


GAS Tube Discharge Lightning Protector N female /N male connectors 0-3.5GHz

Feature:

- Excellent VSWR
- Low Insertion Loss
- Small compact size

Picture:

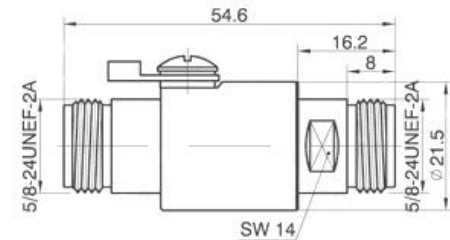


Description	Specifications			
	79-0102	79-0102	79-0102	79-0102
Model	90V	145V	230V	470V
Frequency: (MHz)	DC- 3.5	DC- 2.5	DC- 2.5	DC- 2.5
Insertion Loss (dB)@2.5GH	<0.1	<0.1	<0.1	<0.1
Insertion Loss (dB)@3.5GHz	<0.15			
Input Return Loss (dB)	<-27	<-27	<-27	<-27
Output Return Loss (dB)	<-27	<-27	<-27	<-27
Impedance (ohm)	50	50	50	50
Connector	NM-NF	NM-NF	NM-NF	NM-NF
Temperature Range (C)	-10 /+60	-10 /+60	-10 /+60	-10 /+60
Weight (kg)	0.03	0.03	0.03	0.03
Size (mm)	55 x 20 x 22	55 x 20 x 22	55 x 20 x 22	55 x 20 x 22

Price: A\$29.5 (Excl. GST)

GAS Tube Discharge Lightning Protector N female /N male connectors 0-3.5GHz

- Return Loss Test Results

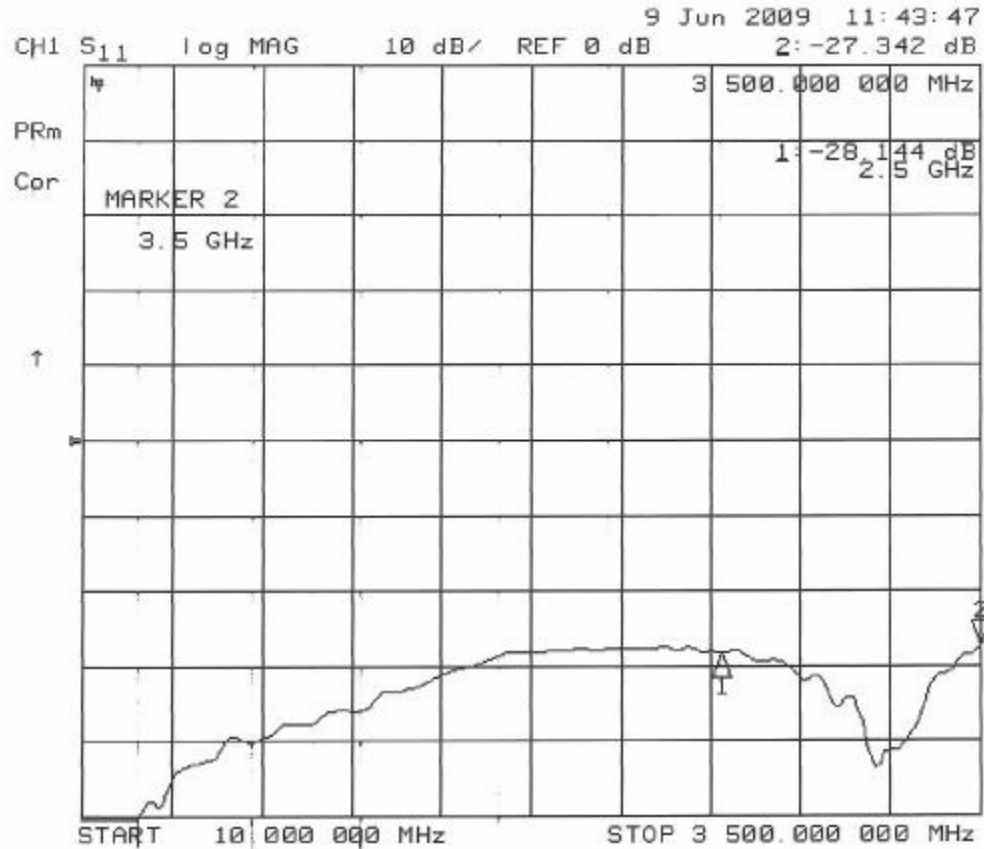

Picture:

