

GAS Discharge Tube Lightning Protector DIN7/16 Male / Female 0-2.5GHz


Feature:

- Excellent VSWR
- Low Insertion Loss
- Small compact size
- Replaceable Gas Tube

Picture:



Description	Specifications			
Model	79-0105	79-0105	79-0105	79-0105
	90V	145V	230V	470V
Frequency: (MHz) Range	DC- 2.5	DC- 2.5	DC- 2.5	DC- 2.5
Insertion Loss (dB)@2.0GH	<0.08	<0.08	<0.08	<0.08
Insertion Loss (dB)@2.5GHz			<0.15	
Input Return Loss (dB)	<-21	<-21	<-21	<-21
Output Return Loss (dB)	<-21	<-21	<-21	<-21
Impedance (ohm)	50	50	50	50
Connector	DI7/16 M-F	DI7/16 M-F	DI7/16 M-F	DI7/16 M-F
Temperature Range (C)	-10 /+60	-10 /+60	-10 /+60	-10 /+60
Weight (kg)	0.04	0.04	0.04	0.04
Size (mm)	69 x 32 x 32	69 x 32 x 32	69 x 32 x 32	69 x 32 x 32

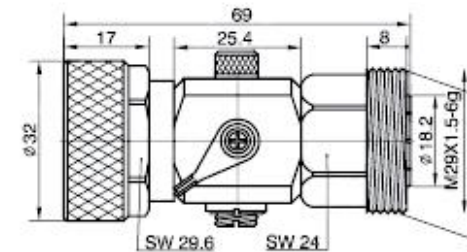

Price: A\$39.5 (Excl. GST)

Please quote the special price for large quantity order

EYou Electronics Store is administered by RACOMTECH ABN: 79 068 236 054. 1 Fort street, Mount Waverley, VIC 3149, Australia

E-mail: sales@eyou.com.au Phone: +61-3-88029296 (Business Day)

GAS Discharge Tube Lightning Protector DIN7/16 Male / Female 0-2.5GHz

- Return Loss Test Results

